


Direct Broadcast Satellite: Architecture and Evaluation

Venkata N. Padmanabhan
padmanab@cs.berkeley.edu

Daedalus Retreat, June 1996

Overview

- Geostationary satellite broadcasts directly to user premises
 - 24 inch dish antenna, ISA adaptor card
- Asymmetric Internet access
 - users typically receive more data than they send
 - 12 Mbps satellite downlink; target rate of 400 Kbps per user
 - slow uplink: SLIP/PPP over a modem line
- Easy to deploy at short notice even in remote locations

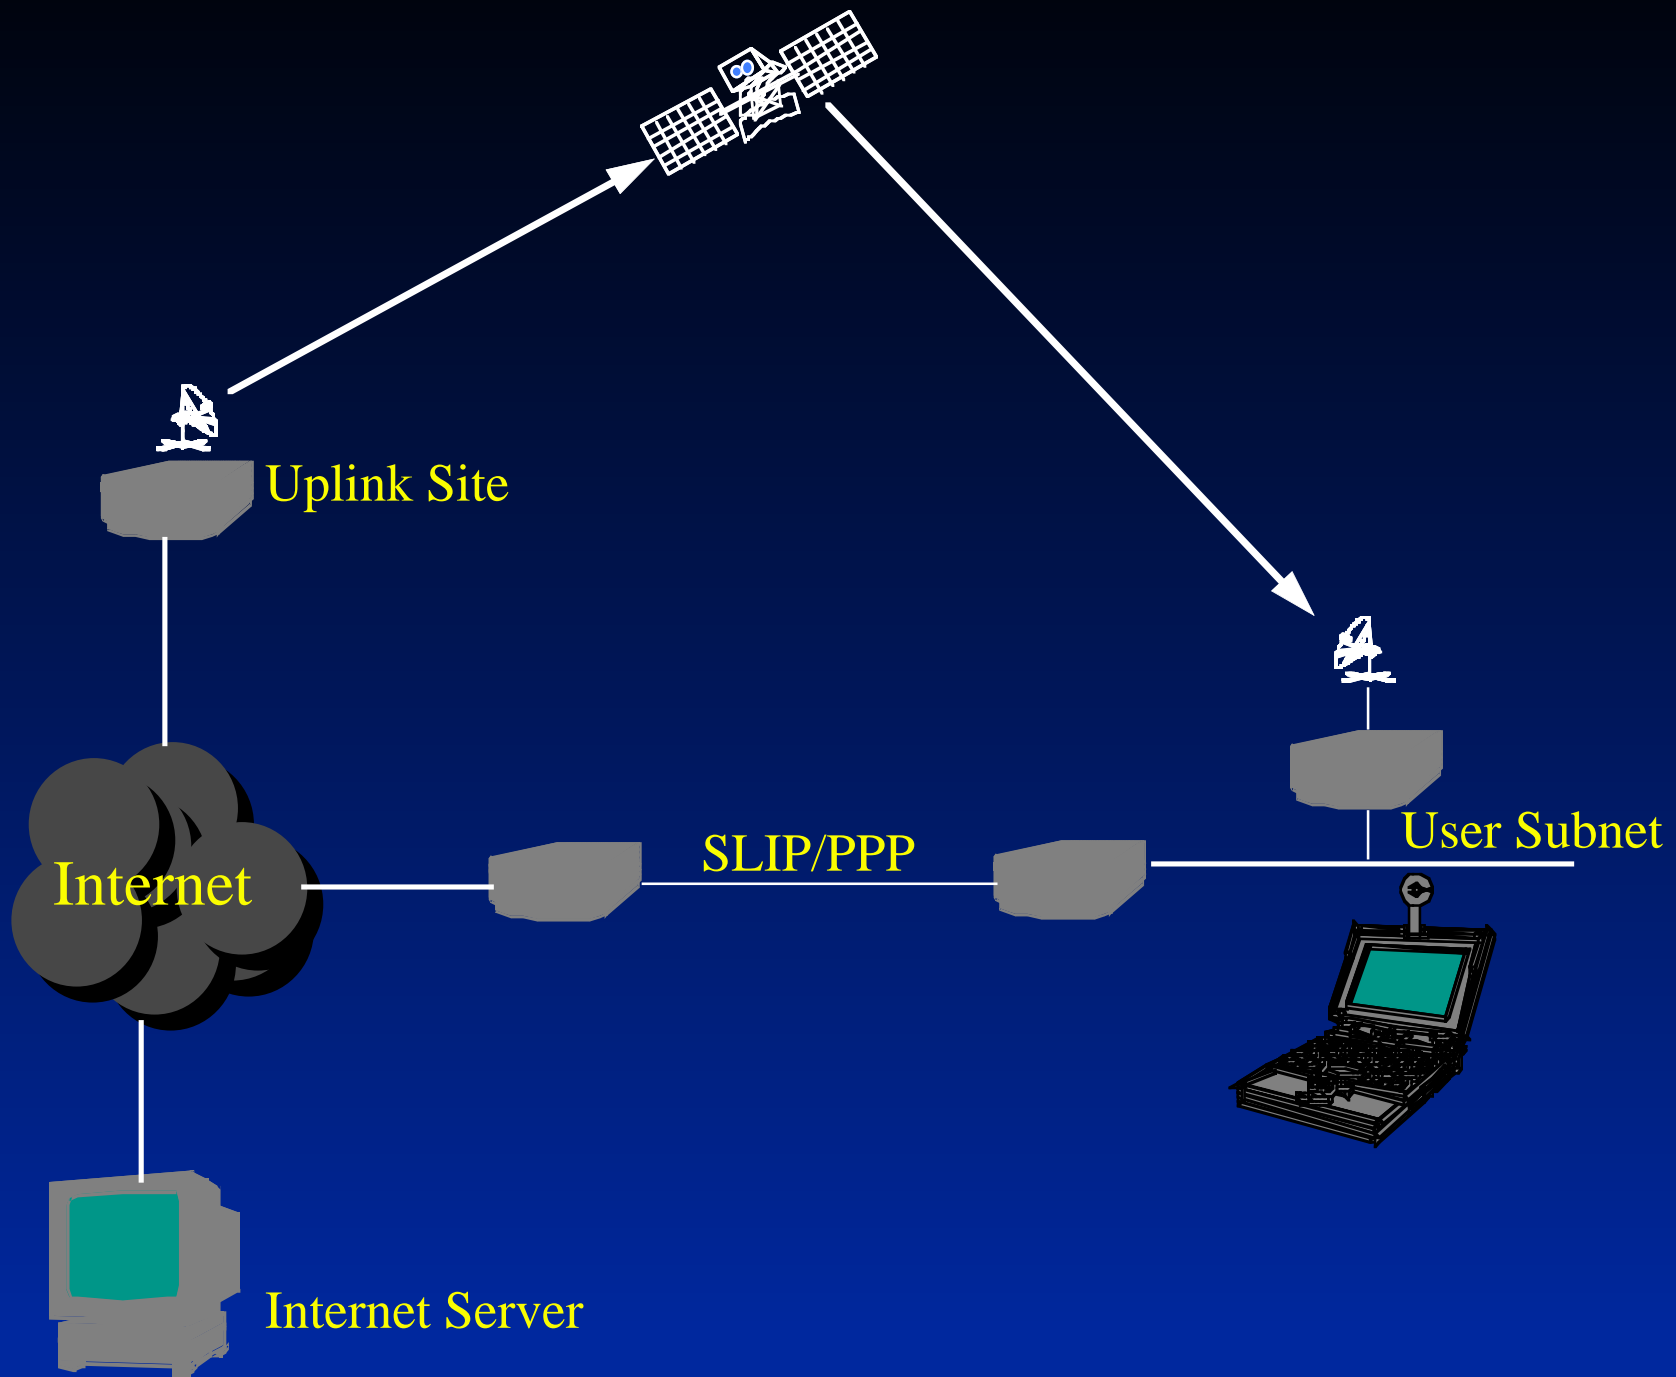


Asymmetric Routing

- Outgoing traffic over the SLIP/PPP line;
Incoming traffic over the satellite hop
- Option 1: Encapsulation
 - outgoing packets use DBS source address
 - packets sent encapsulated over the SLIP line
 - works for a single host but not for a subnet
- Option 2: Home agent-based routing
 - outgoing packets use home source address
 - home agent tunnels incoming packets over DBS
 - a more general solution

Transport Issues


- Large bandwidth-delay product
 - TCP sender and receiver need to maintain large windows to keep the “data pipe” full
 - 500-1000 Kbps times 1 second = 50-100 KB
- Asymmetric bandwidth
 - Uplink has much smaller bandwidth than the downlink
 - TCP acknowledgements stream might throttle the flow of data packets

UDP Throughput

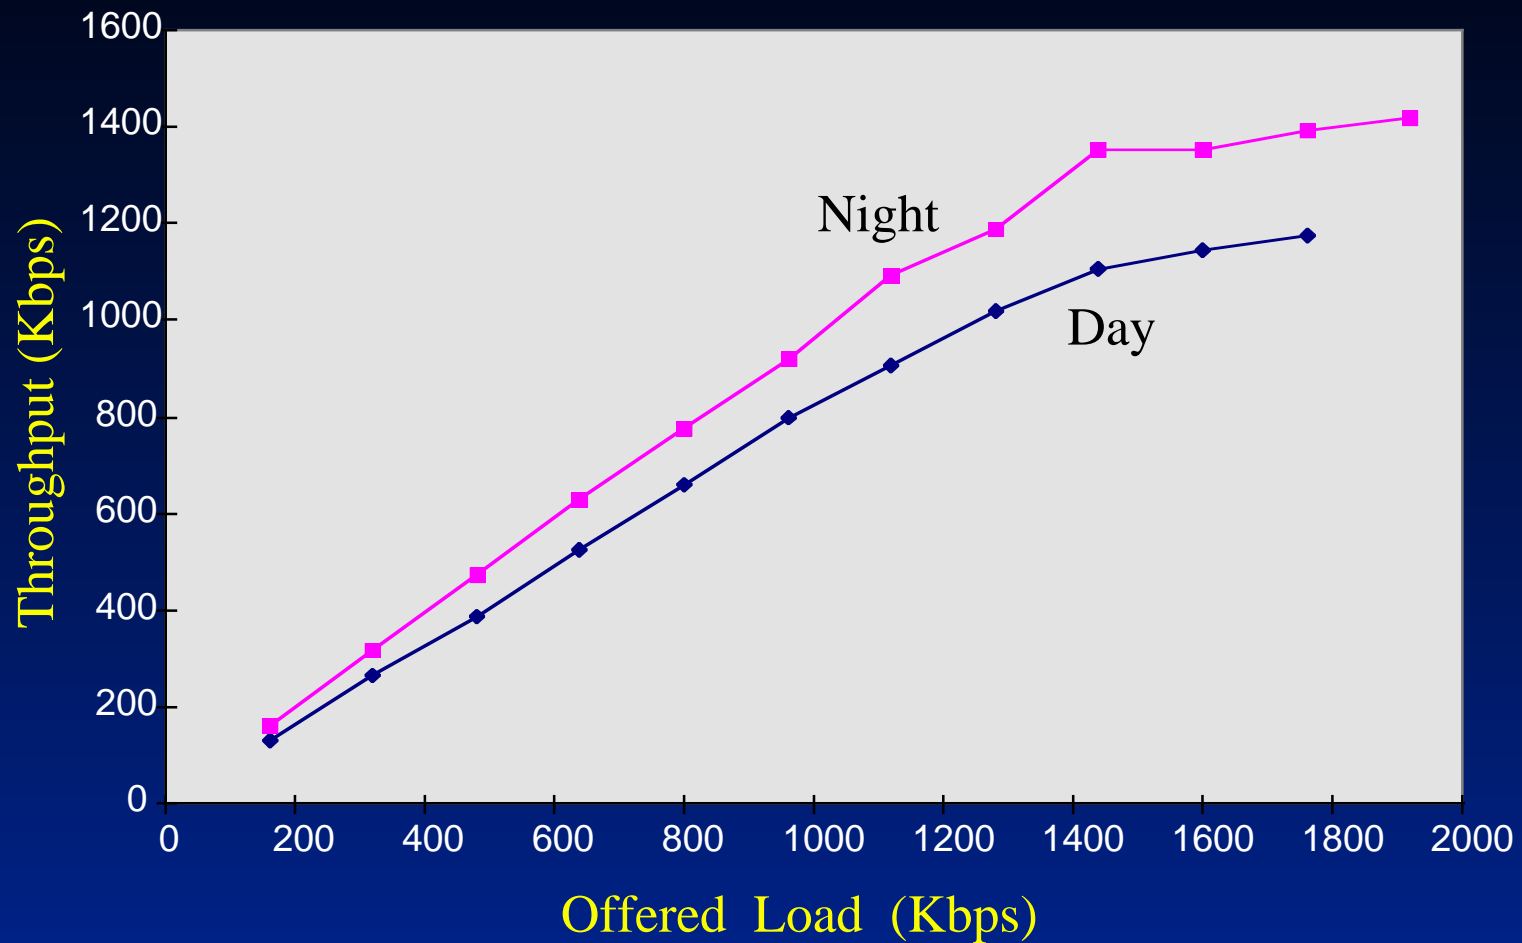


- Throughput tapers off beyond an offered load of about 1.4 Mbps

UDP Loss Rate

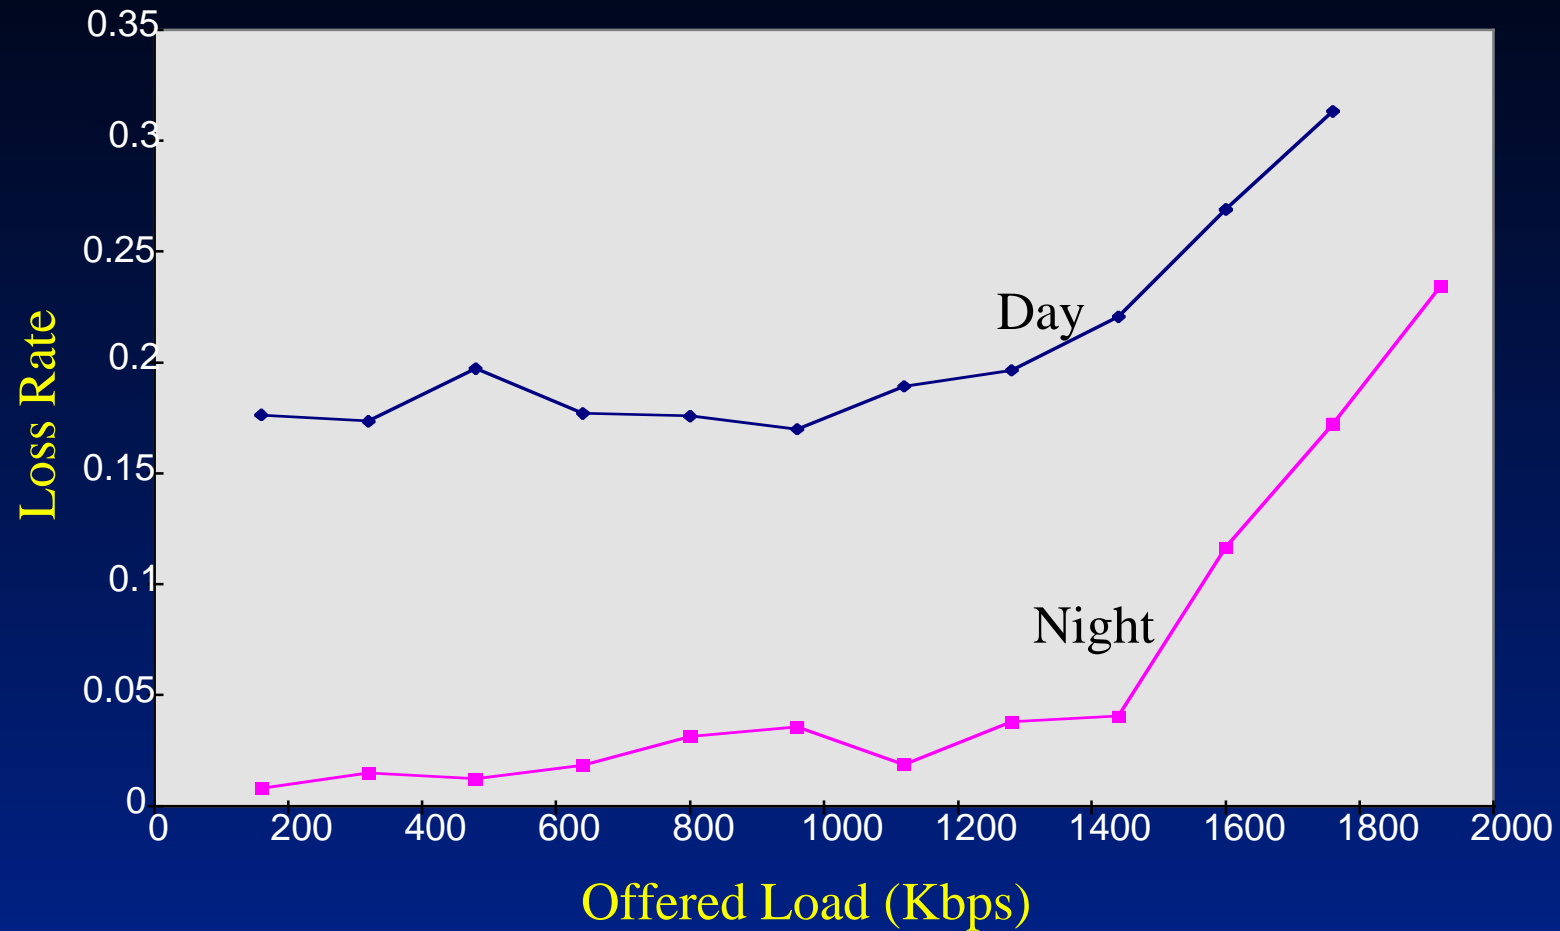


- High loss rate due to Internet during the day
- Sharp upswing for offered load beyond 1.4 Mbps

TCP Throughput

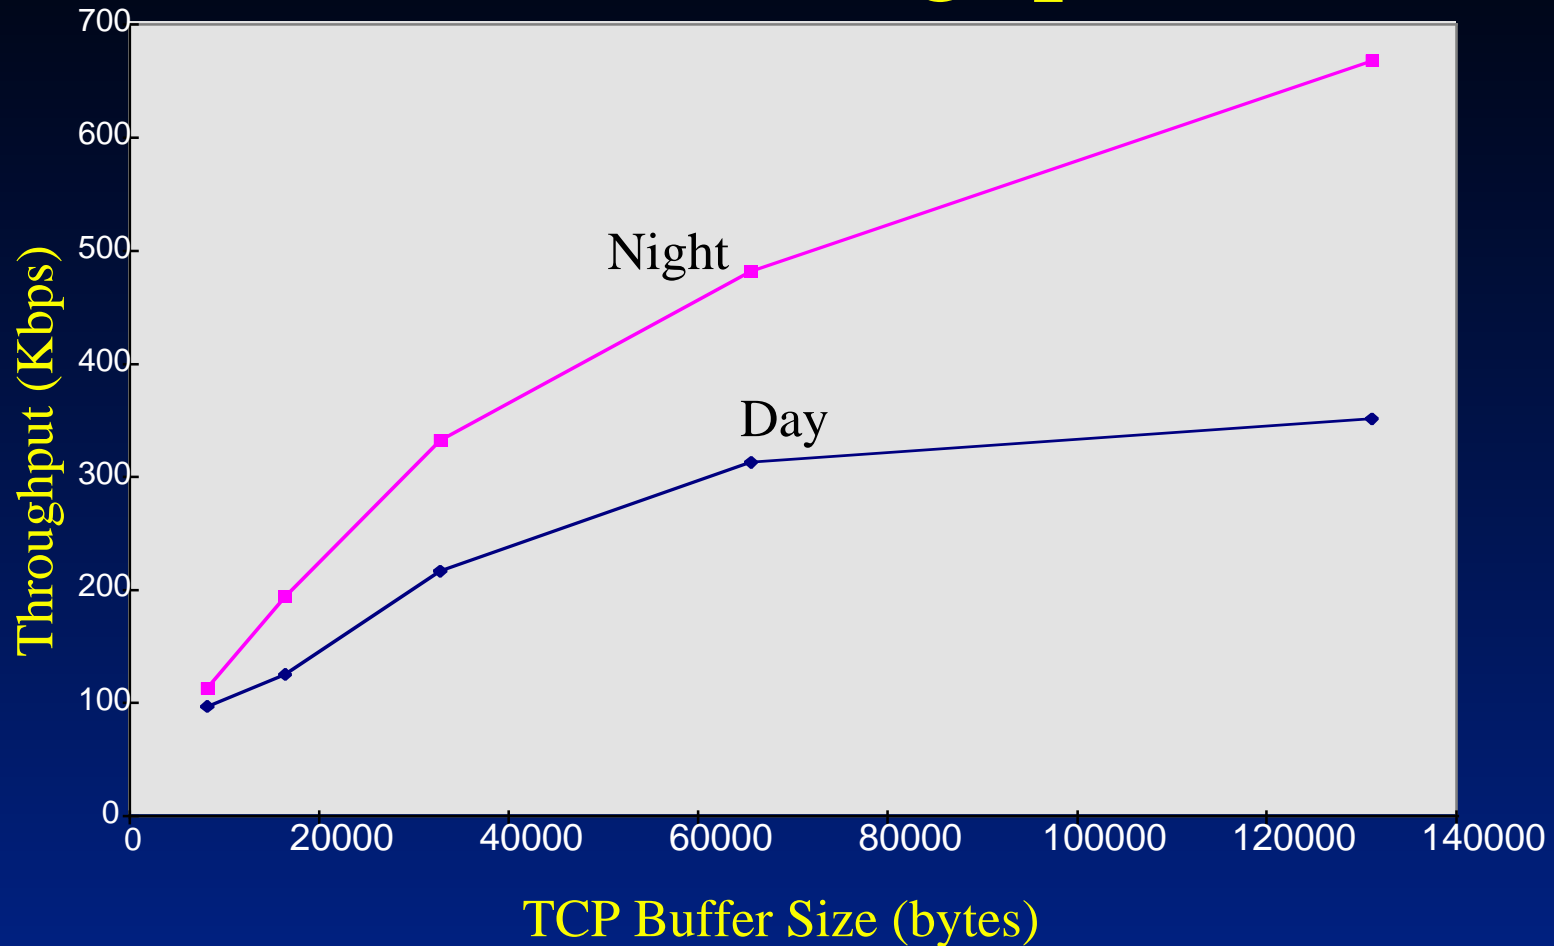

- Poor throughput for the 8-32 KB buffers used by most Internet servers
- Comparable to UDP when loss rate is low


TCP Dynamics

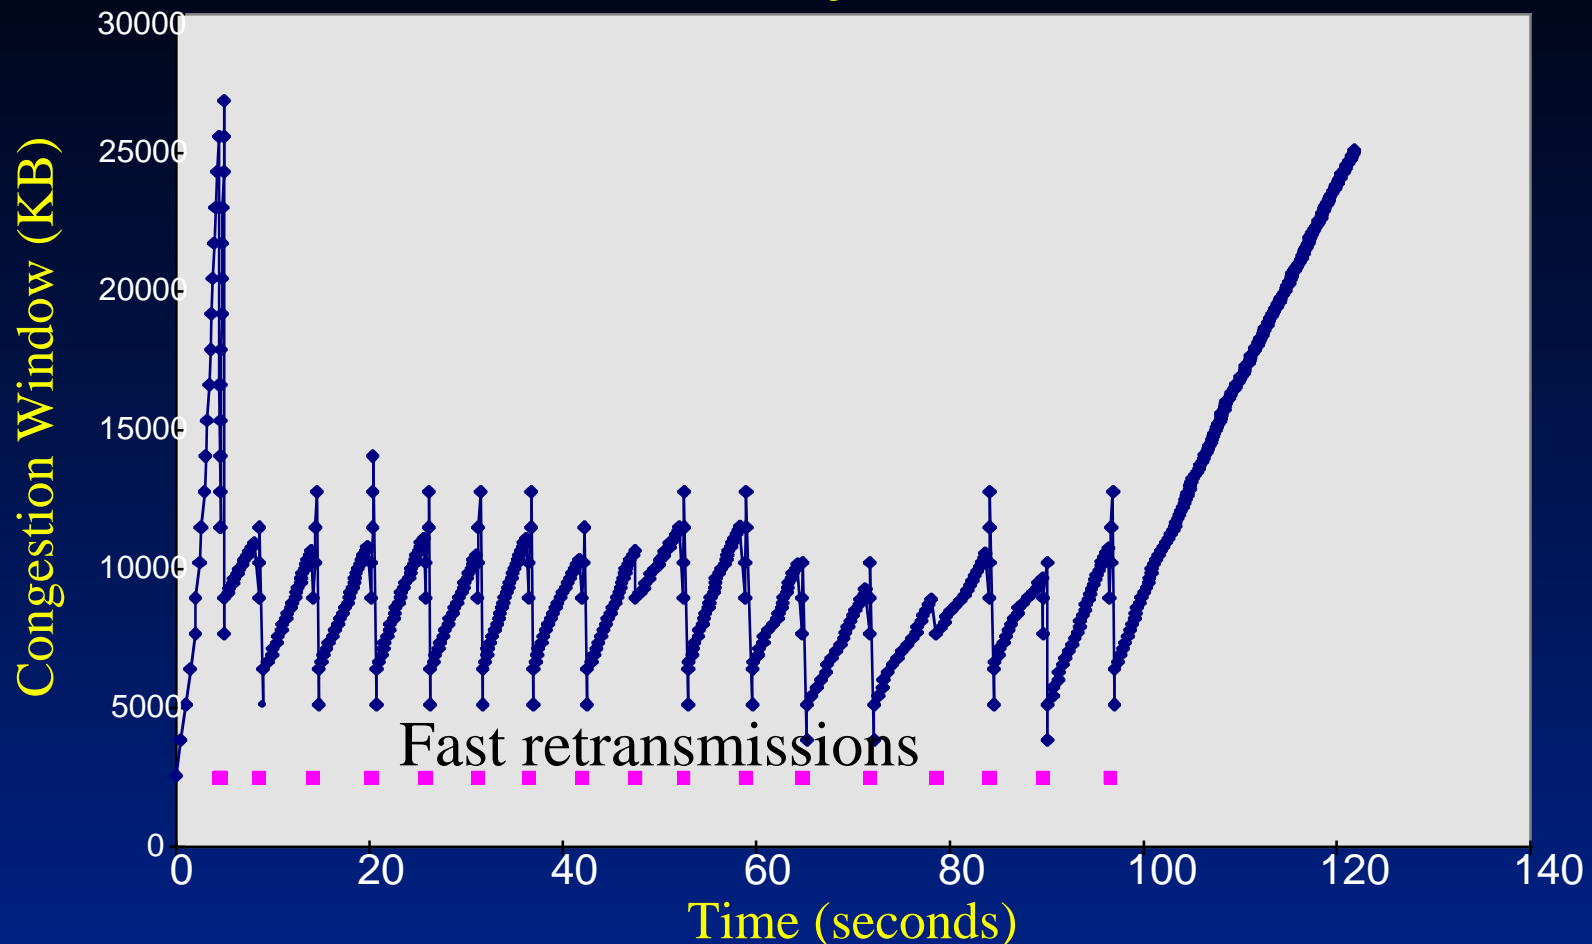

- 2 MB transfer with 130 KB buffers
- Poor throughput due to fluctuation in congestion window size though not timeouts at source

TCP Throughput

(Internet only)

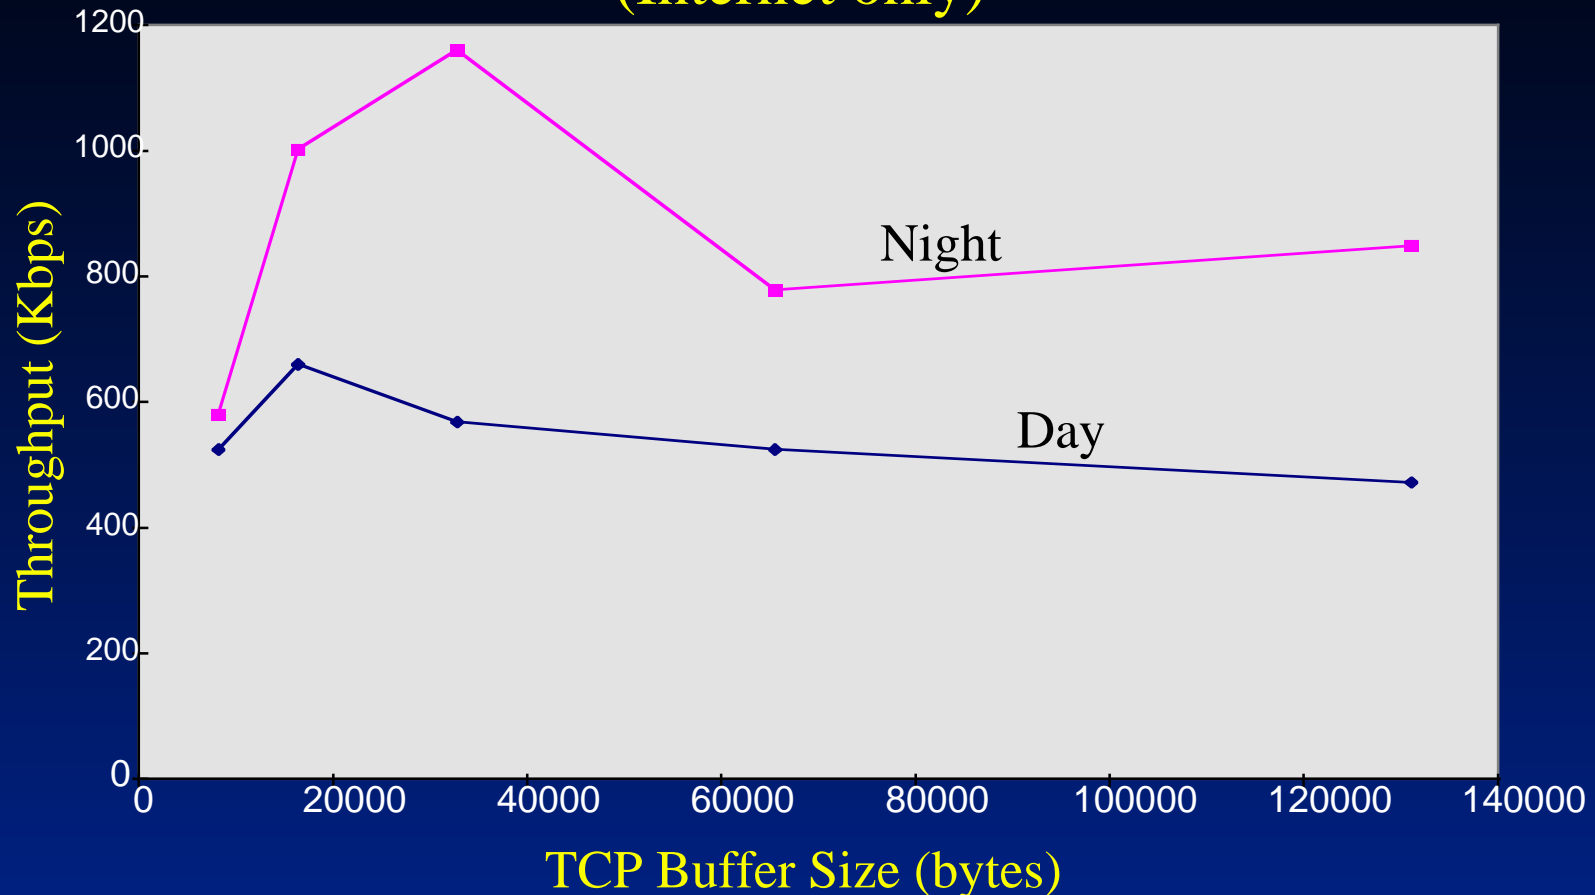

- Best throughput for 16-32 KB buffers
- Deterioration for large buffers presumably due to increased burstiness of the source

Conclusions

- Performance of DBS system is often limited by the Internet
- Large TCP windows needed to keep data pipe full
 - buffer sizes typically used by servers on the Internet are too small
 - but large buffer sizes could increase source burstiness and lead to Internet losses.

Future Work

- Improve performance of data transport
 - install host close to uplink to evaluate the satellite hop in isolation
 - split-connection approach (for instance, in conjunction with a Web proxy cache)
 - reduce burstiness of TCP source
- Evaluate application-specific solutions
 - plentiful downlink bandwidth, large latency
 - suitable for predictive prefetching of Web data [PM96]

Status of the UCB Testbed

- One DirecPC host fully functional
 - BSD/OS driver for the ISA adaptor card (Keith Sklower)
- Home agent-based routing
- Web browsing and video dissemination demonstrated